



Dimensions

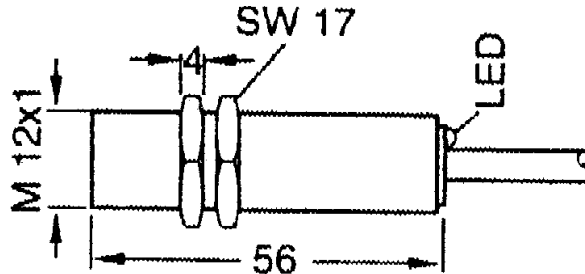

Connection diagram

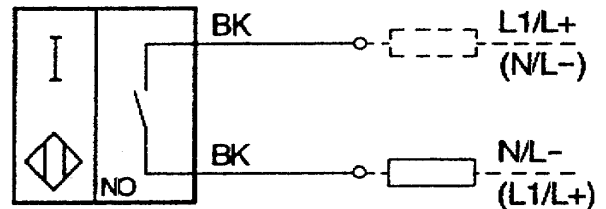

Technical Data

Output function		NO
Operating voltage	[VDC]	20...320
including residual nipple	[VAC]	20...265
Loading capacity continuous	[mA]	200
Current input	[mA]	1,5 (AC) / 1,0 (DC)
Short circuit / overload protection		no
Polarity reversal protection		yes
Operating frequency	[Hz]	25 (AC) / 1200 (DC)
EMC		EN 60947-5-2
Indicator		LED
Temperature range	[°C]	-25...+80
Repeat accuracy	[mm]	0,04
Response time	[ms]	0,4
Build-up time	[ms]	0,4
Availability delay	[ms]	100
Rated operating distance (s_n)	[mm]	2,0 flush
Type of protection		IP67
Type of connection		2 m PUR-cable 2 x 0,25 mm ²
Housing material		Brass, nickel-plated