

ELECTRICAL SPECIFICATIONS

SPDT
 15 AMPS, 125, 250 or 480 VAC;
 1/8 Hp, 125 VAC; 1/4 Hp, 250 VAC;
 1/2 AMP, 125 VDC; 1/4 AMP, 250 VDC.


○ N.O. (Full)

○ N.C. (Low)

SHOWN WITH RESERVOIR EMPTY.

ASSEMBLY INSTRUCTIONS

- 1) Unscrew 51039 Nut from 13879 Bushing and remove 69181 Lockwasher.
- 2) Assemble micro-switch enclosure to drum cover and tighten.
- 3) Place 84633 Follower on vent and pump tubes.
- 4) Attach 70464 Chain to 14259 Rod and 84633 Follower by the 57104 Rings.
- 5) With assembly in upright position, lower follower until connecting chain activates micro-switch. Position 16613 Collar in recess under follower and secure to pump tube. Check assembly for proper operation.

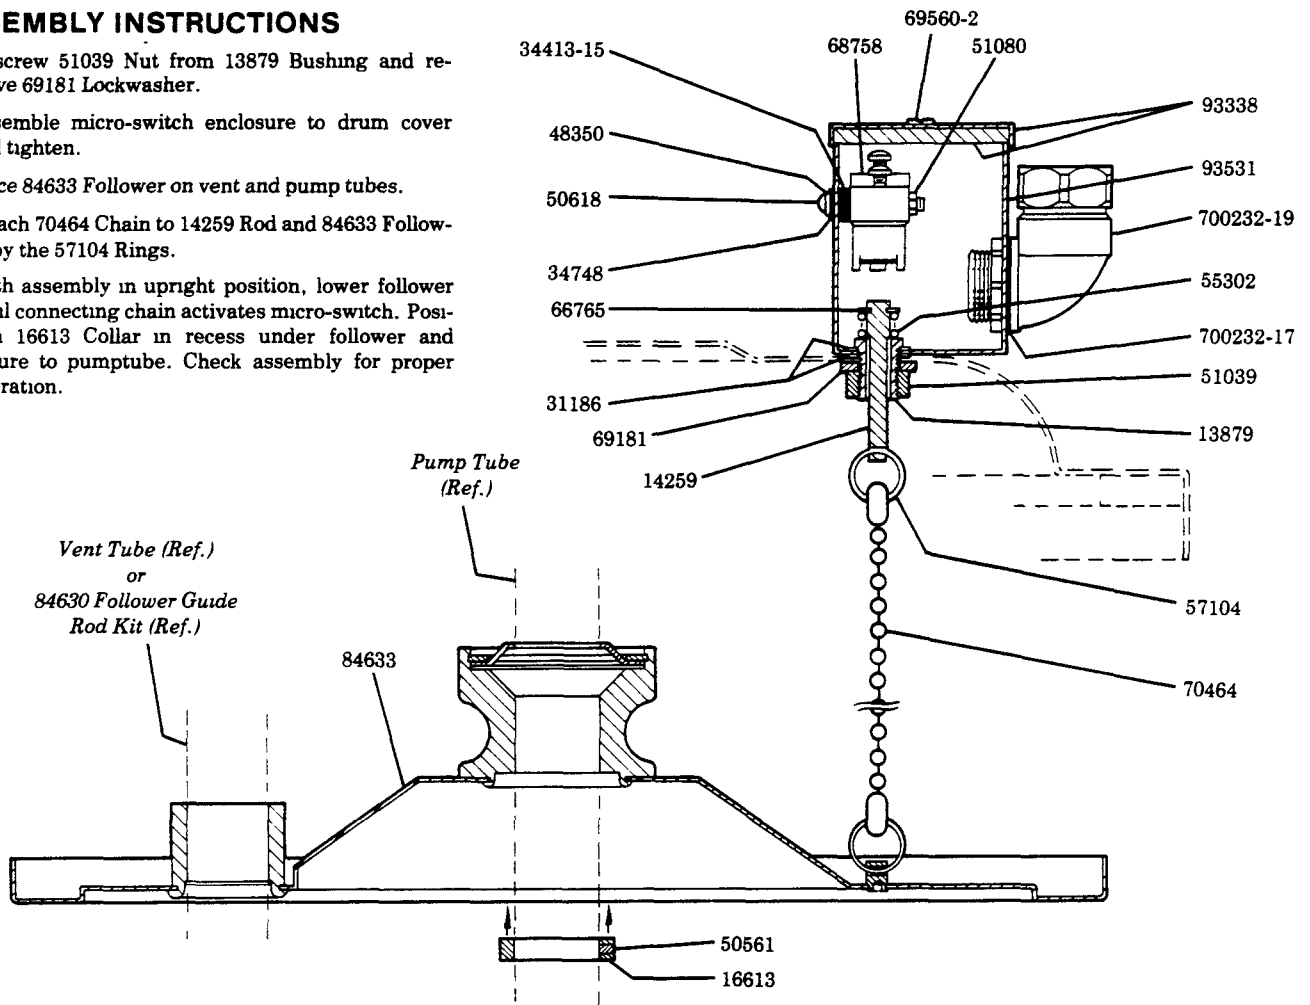

SERVICE PARTS

Part	Qty.	Description	Part	Qty.	Description	Part	Qty.	Description
13879	1	Bushing	50618	2	Screw	69560-2	2	Screw
14259	1	Rod	51039	1	Nut	70464	1	Chain
16613	1	Collar	51080	2	Nut	84633	1	Follower
31186	2	Washer	55302	1	Spring	93338	1	Cover & gasket assembly
34413-15	2	Gasket	57104	2	Retaining ring	93531	1	Enclosure assembly
34748	2	Gasket	66765	1	Retaining ring	700232-17	1	Gasket
48350	2	Washer	68758	1	Micro-switch	700232-19	1	Conduit connector
50561	2	Set screw	69181	1	Lockwasher			