


#### GENERAL

The RF Remote Antenna Kit is for use with the LFC 2000 in applications where the Keypad is mounted in a location that is isolated from the RF meter. In this type of application there may be significant obstructions that may impact RF communications between the Keypad and the RF Meter. The Remote Antenna Kit allows for the Keypad Antenna to be mounted in a location up to 17 feet from the Keypad to eliminate potential obstructions.

Typical applications where the keypad may be obstructed:

- High Bay Garages: Truck Maintenance Facilities
- Sheet Metal Walls separating the keypad location from the service bays
- Wire Mesh (Stucco) separating the keypad location from the service bays.

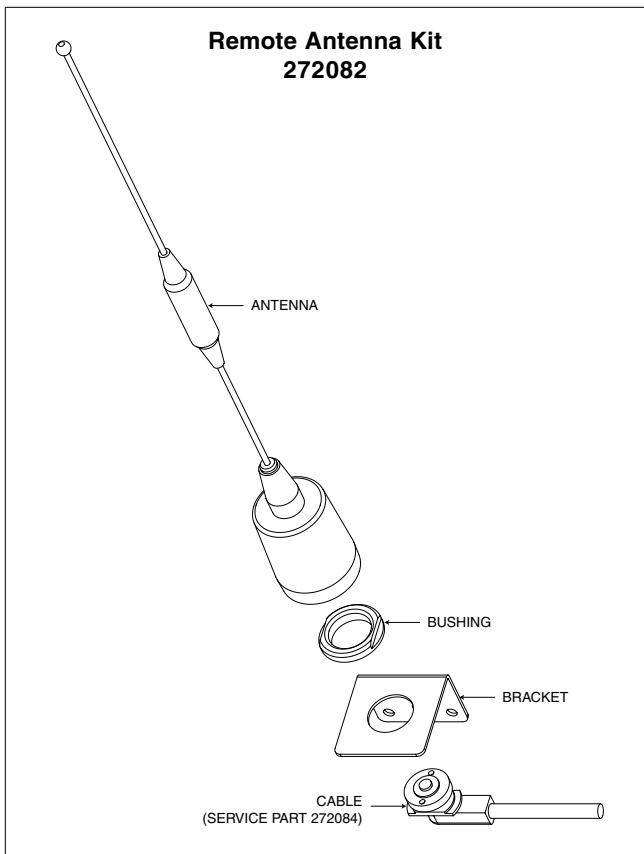

#### KIT INCLUDES:

- RF Remote Antenna
- Antenna L-Bracket
- 17 Foot Antenna Cable

#### INSTALLATION

Mount the L-bracket at the desired level above possible obstruction and within the 17 foot cable length to the keypad. Affix the brass antenna mount using the locking ring to the bracket. Then attach the Antenna to the brass antenna mount. Remove the short antenna from the keypad and attach the BNC connector from the cable to complete the installation. Refer to the diagram to the left.